




O.NOVO BTW TOILET SUITE

Product Image



Technical Specifications

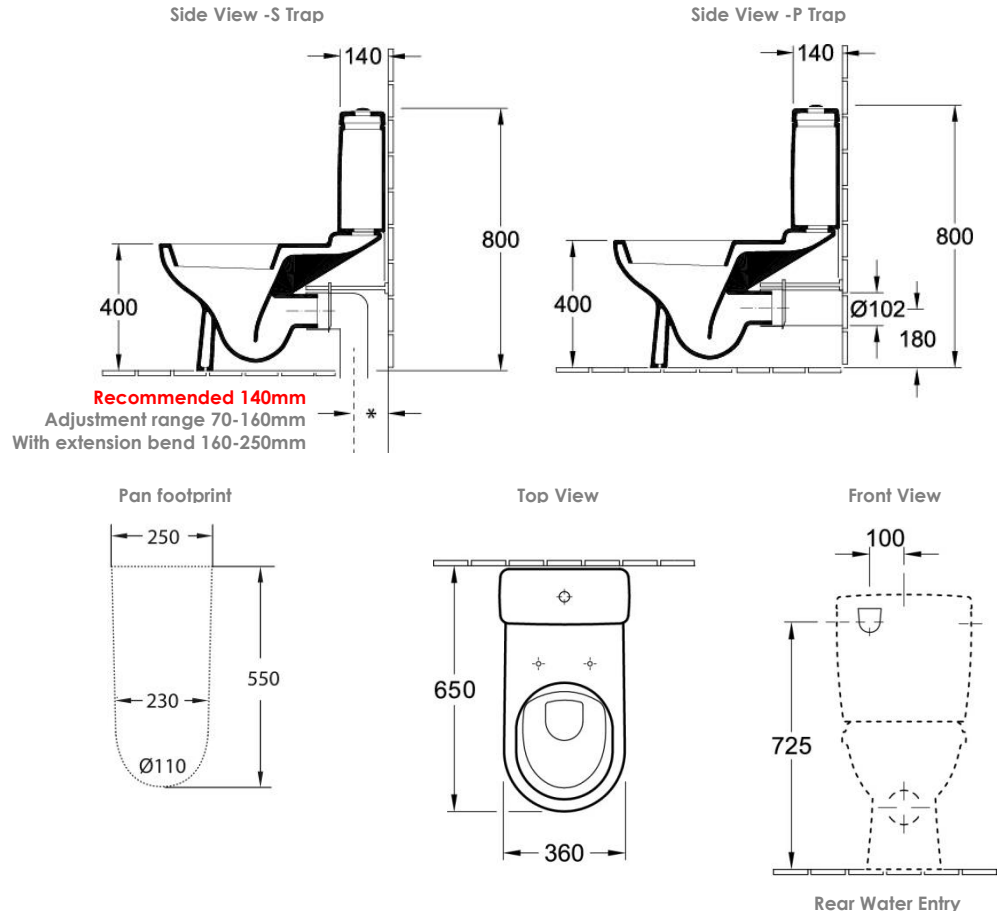

(For INSTALLATION NOTES see over page)

Code/Description

O.novo BTW Toilet Suite
 with Rear Water Entry & Soft Closing Seat

- 56580101S4DB** S-Trap
- 565801R1S4DB** S-Trap with CeramicPlus
- 56581001S4B** P-Trap
- 565810R1S4B** P-Trap with CeramicPlus


Additional Information

- 5 Year Warranty *Conditions Apply



4.5/3L WELS 4 Star





O.NOVO BTW TOILET SUITE

Installation Notes

Water Entry: Rear water entry requires ½" BSP male thread extending 10mm past the finished wall

S-Trap Set-out*: (See table below)

S-Trap Set-out options	Distance from finished wall to centre of soil pipe	Vario Bend required		Installation Notes
Recommended	140mm	50015P	Supplied standard with S-trap Suites	To be cut to required length on-site
Standard Adjustment Range	70-160mm	50015P	Supplied standard with S-trap Suites	To be cut to required length on-site
With extension bend	160-250mm	8702	Order separately with P-Trap Suite	To be cut to required length on-site - Requires installation into DWV pipe (adaptor supplied) or into a pan collar installed flush with the finished floor

Flushing options: 4.5/3L toilets can be easily converted to 6/3L on-site where it is approved to do so, one-click conversion instructions are included inside the cistern

